


USE THIS SHEET FOR REGULATION OVERHEAD CONCEALED DELAYED ACTION CLOSER

Delaying action depends on the templating used to mount the closer. Full delayed action takes place from the maximum degree of opening that the closer is templated for and releases to general speed approx. 25° from that point.

Use template and instruction sheet packed with closer for installation and regulating backcheck, main speed & latch speed.

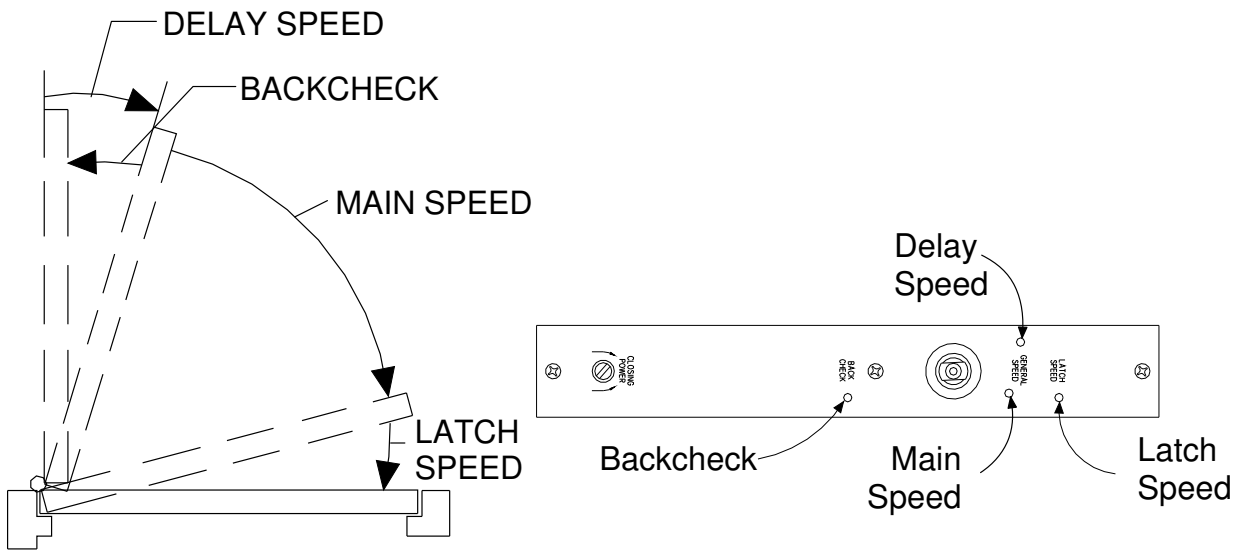

**! - DO NOT USE ABRUPT BACKCHECK -
 NOR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP**

REGULATING DELAYED ACTION TIME:

Closer is regulated for approximately 60 seconds of delay time. If a change is necessary, regulate as follows:

NOTICE - SENSITIVE ADJUSTING SCREW !

To decrease the delaying time of door, turn slotted head screw counter - clockwise a few degrees at a time.

To increase the delaying time of door, turn slotted screw clockwise a few degrees at a time.