



73093


4050A Series



62A Bracket


Installation Instructions

4050A Push Side (Door Mount) 62A Bracket

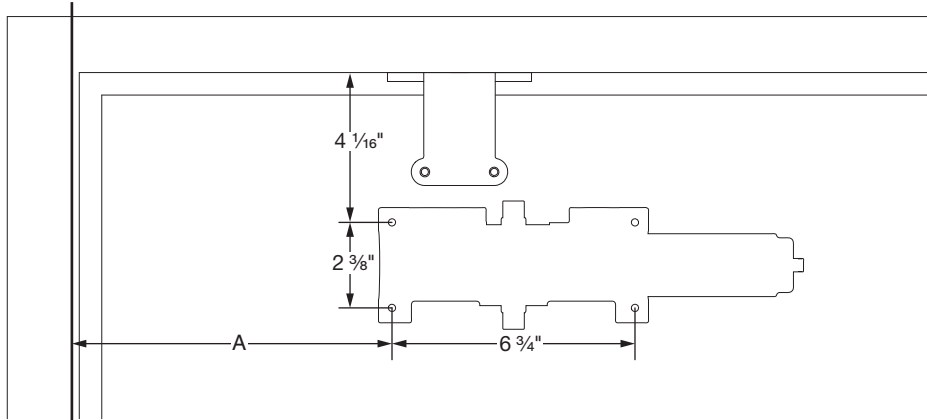

LEFT HAND DOOR SHOWN,
RIGHT HAND OPPOSITE.

Locate drop plate & shoe from centerline of pivot or swing clear hinge pin when used.

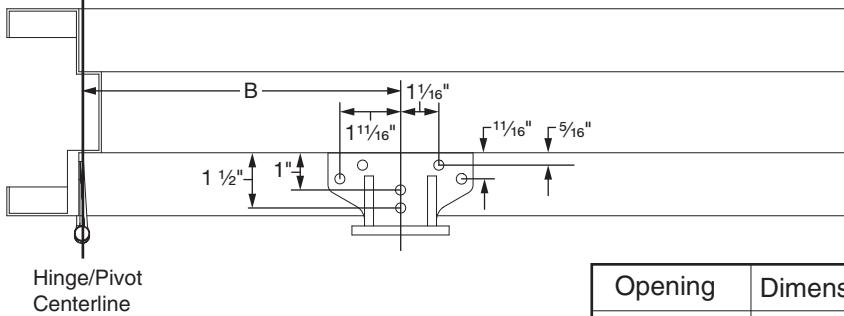

Hinge/Pivot
Centerline

INCH	5/16	11/16	3/4	15/16	1 1/16	1 1/2	1 11/16	1 3/4
M.M.	8	17	19	24	27	38	43	44
INCH	4	5 7/16	6 15/16	7 7/8	8 1/4	8 7/16	10	11 1/2
M.M.	102	138	176	200	210	214	254	292

Opening	Dimension A	Dimension B
To 100°	8 1/8"	10 3/8"
101° to 130°	7 1/8"	9 3/8"
131° to 150°	6 5/8"	8 7/8"
151° to 180°	5 5/8"	7 7/8"

General Notes

- 1a *Locate closer and shoe from centerline of pivot or swing clear hinge pin when used.
 - 1b **This dimension is always from the same surface as the shoe is mounted on.
 - 1c Top rail less than 7 1/2" requires a drop plate.
 - 1d The auxiliary stop is shown for reference only. This template may be used to provide clearance for other types of hardware such as coordinators, sound seals, etc.
 - 1e Reinforcing per ANSI/SDI-100 recommended for hollow metal doors and frames.
 - 1f Closer size is 10" x 2 1/4" x 2 7/8".
- ⓘ **Attention!**
- Stop width 1 1/4" to 3 1/4" mount shoe in rabbet behind stop.
 - Stop width over 3 1/4" mount shoe to stop face no closer than 1 1/4" to door face.
 - Use the five mounting screws provided.


Customer Service

1-877-671-7011 www.allegion.com/us



© Allegion 2019
Printed in U.S.A.
73093 Rev. 09/19-a

4050A Push Side (Door Mount) 62A Bracket w/ Drop Plate 4050A-18

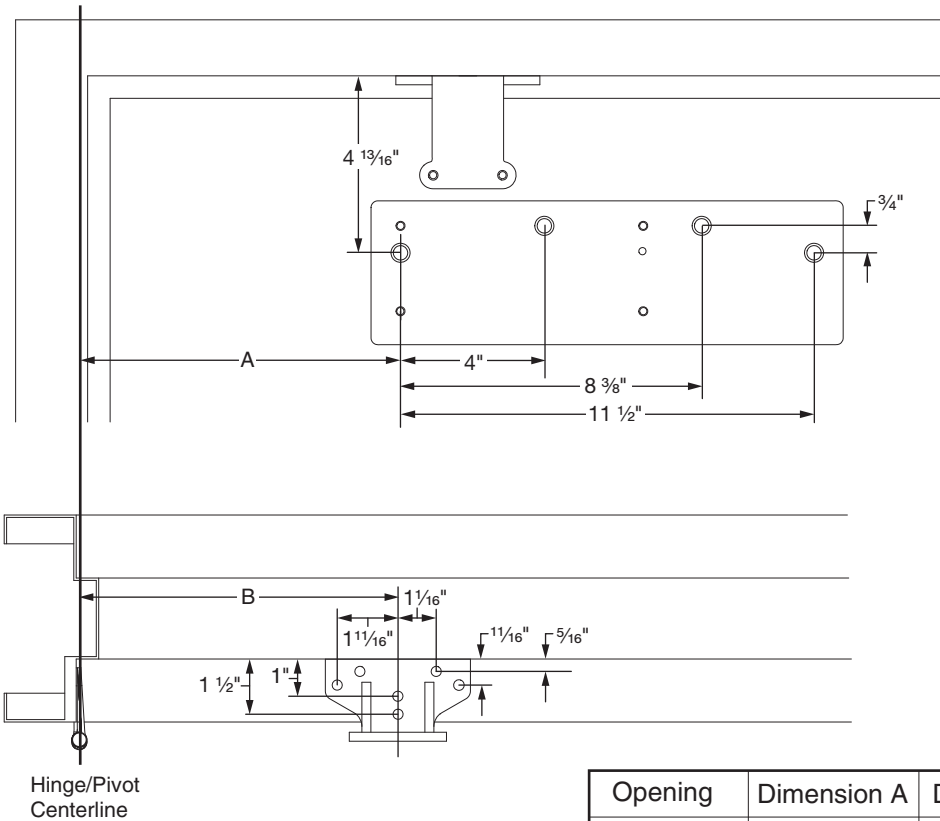

LEFT HAND DOOR SHOWN,
RIGHT HAND OPPOSITE.

Locate drop plate & shoe from centerline of pivot or swing clear hinge pin when used.

INCH	$\frac{5}{16}$	$\frac{11}{16}$	$\frac{3}{4}$	$\frac{15}{16}$	$1\frac{1}{16}$	$1\frac{1}{2}$	$1\frac{11}{16}$	$1\frac{3}{4}$
M.M.	8	17	19	24	27	38	43	44
INCH	4	$5\frac{7}{16}$	$6\frac{15}{16}$	$7\frac{7}{8}$	$8\frac{1}{4}$	$8\frac{7}{16}$	10	$11\frac{1}{2}$
M.M.	102	138	176	200	210	214	254	292

Opening	Dimension A	Dimension B
To 100°	8 1/8"	10 3/8"
101°to 130°	7 1/8"	9 3/8"
131°to 150°	6 5/8"	8 7/8"
151°to 180°	5 5/8"	7 7/8"